



The pipe that makes it easy to connect the AC



FREO - PIPE

F L E X I B L E A / C P I P E



RAPID


SAFE

RESISTANCE




Freo-Pipe® is available in diameters
1/4", 3/8", 1/2", 5/8"

Construction Features

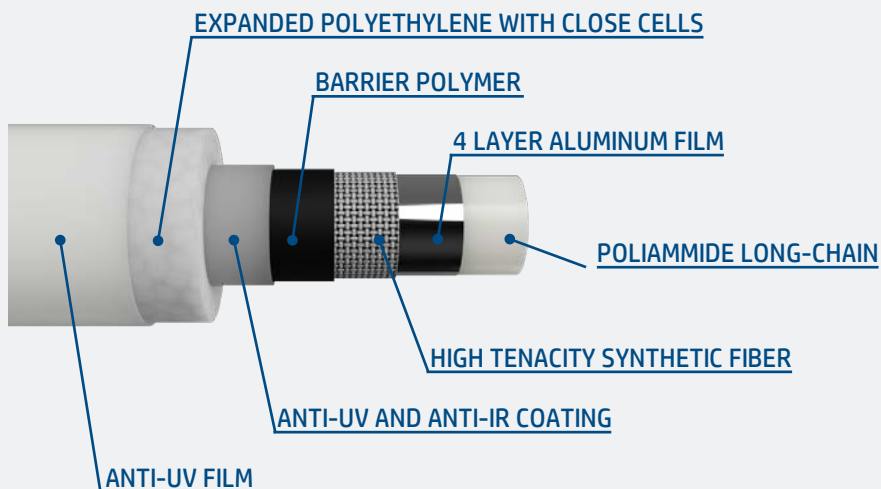

BRASS "ELICA" FITTING:
GAUGES, SCREWS, CRIMPS

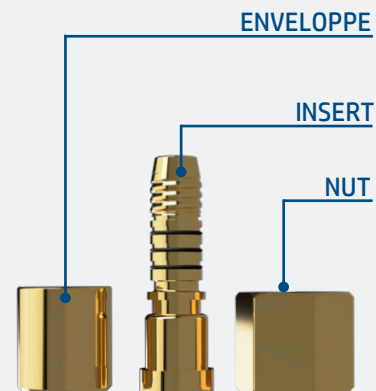


SOME TECHNICAL DATA

Field of use

F-GAS refrigeration circuits containing **R410A, R32, R134a, R404A, R407C (Not compatible with R22)**
Operating temperatures **-30°C / +110°C (max 130°C not continuous)**
Maximum working pressure **60 bar (Design pressure 100 bar)**

REFERENCE REGULATIONS AND STANDARDS

Global compliance with	UNI EN 1736:2009 (EN 1736:2008)
Coating (thermal conductivity)	UNI 8457 - UNI 9174
Coating (fire resistance)	UNI EN 1382:2014 - UL 94:2001
Permeation resistance	EN 1736:2008 Par. 7 Classe 1

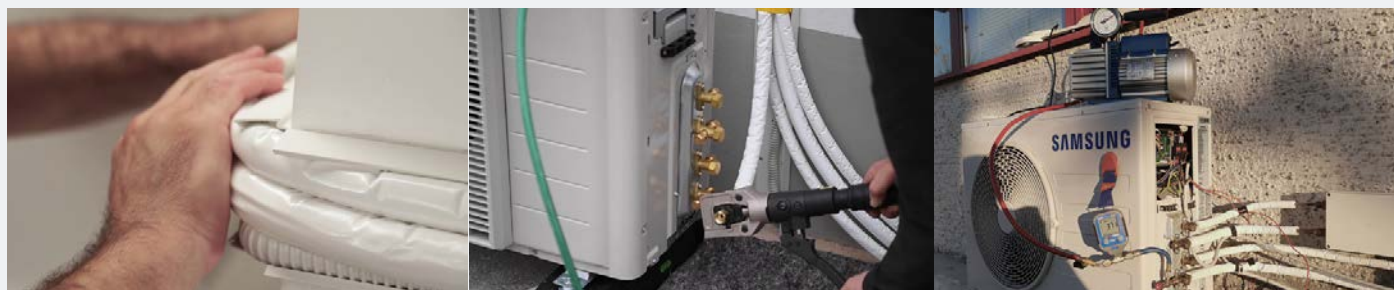

Freo-Pipe® System - PIPES

TUBES KIT

Code	Description
11060.04	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/4" L. 4m
11060.08	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/4" L. 8m
11060.12	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/4" L. 12m
11060.16	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/4" L. 16m
11060.00	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/4" L > 16m (On Request)

Code	Description
11061.04	FREO-PIPE® Tube With UV-PRO Insulation Φ 3/8" L. 4m
11061.08	FREO-PIPE® Tube With UV-PRO Insulation Φ 3/8" L. 8m
11061.12	FREO-PIPE® Tube With UV-PRO Insulation Φ 3/8" L. 12m
11061.16	FREO-PIPE® Tube With UV-PRO Insulation Φ 3/8" L. 16m
11061.00	FREO-PIPE® Tube With UV-PRO Insulation Φ 3/8" L > 16m (On Request)

Code	Description
11062.04	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/2" L. 4m
11062.08	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/2" L. 8m
11062.12	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/2" L. 12m
11062.16	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/2" L. 16m
11062.00	FREO-PIPE® Tube With UV-PRO Insulation Φ 1/2" L > 16m (On Request)

Code	Description
11063.04	FREO-PIPE® Tube With UV-PRO Insulation Φ 5/8" L. 4m
11063.08	FREO-PIPE® Tube With UV-PRO Insulation Φ 5/8" L. 8m
11063.12	FREO-PIPE® Tube With UV-PRO Insulation Φ 5/8" L. 12m
11063.16	FREO-PIPE® Tube With UV-PRO Insulation Φ 5/8" L. 16m
11063.00	FREO-PIPE® Tube With UV-PRO Insulation Φ 5/8" L > 16m (On Request)



WHAT IS UV-Pro?

It is a pearly gray coating resistant to UV rays and the aggression of sunlight 3 times more than the common polyethylene film. This type of coating preserves both the pipe and the insulating coating, and is therefore able to guarantee an excellent performance of the air conditioning system.

Freo-Pipe® KIT

FREO-PIPE KIT



Freo-Pipe® KIT is inclusive of 2 pipes already connected and tested by Nitrogen at 78 bar, available in various lengths, the best solution for **quick** and **efficient** installations and to make you finally forget leaking folders! Each kit is individually packaged in sealed bags and is ready for use. Can't find the length that's right for you? Ask our consultants for help.

N.B. To fix the Freo-Pipe® KIT fittings, the use of the appropriate assembly oil (SKU 11419) is required.

FREO - PIPE

F L E X I B L E A / C P I P E

Manufacturing Plant
Viale L. Da Zara, 10
Albignasego (PD)
ITALY



info@freo-pipe.com



+966 59 415 4040



CONDITIONING



HEATING

FREO-PIPE®

WWW.FREO-PIPE.COM

DESIGN ACCORDING TO EN 1736.2009



WEBSITE



YOUTUBE